


Technical data sheet

Lightning current arrester, 3-pole

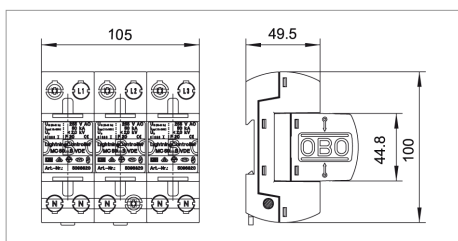

LightningController set, 3-pole, for use in TN-C networks:

Completely pre-terminated and ready for connection, consisting of:
 MC 50-B VDE: Type 1 (Class B) lightning current arrester in accordance with DIN EN 61643-11 for interface 0 to 1 (LPZ) to and/or in accordance with lightning protection concept to IEC 61312-1 and/or DIN V VDE V 0185-305 (IEC 62305)


- VDE test marks
- Conforms to VDN Directive 2nd Edition 2004
- Cover and base, plug-in cover
- Arresting capacity 50 kA (10/350 μ s) per pole
- Voltage protection level kV
- Line following current quenching 25 kA I_{peak}
- Incl. plug caps for identifying the connections
- Encapsulated, non-extinguishing spark gap: can be used in standard distributor housings

Application example: Industrial plants; lightning current arrester in accordance with VDN Directive 2nd Edition 2004 for pre-meter area. Note: Required as decoupling length for surge voltage protection of 5 m of cable.

Type	Max. continuous operating voltage V	Version	Pack. pcs	Weight kg/100 pcs.	Art-No.
MC 50-B 3	255	3-pole	1	117.000	5096876

/pc.

Connection-/Circuit diagram

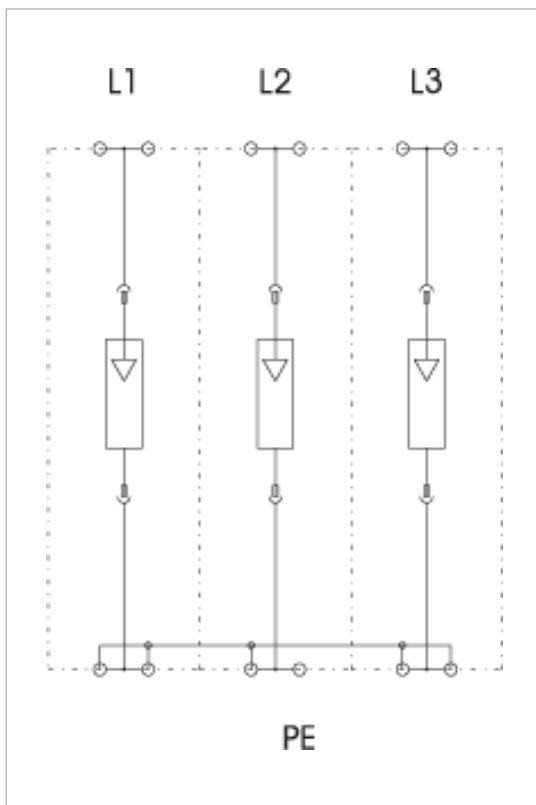

Article number			5096876
Nominal voltage	U_N	V	230
SPD to EN 61643-11			Type 1
SPD to IEC 61643-11			class I
Lightning protection Zone LPZ			0→1
Impulse discharge current (10/350)	I_{imp}	kA	50
Total discharge current (10/350)	$I_{Total\ 8/20}$	kA	150
Nominal discharge current (8/20)	I_n	kA	50
Arrestor surge current (8/20) [total]	$I_{Total\ 8/20}$	kA	150
Voltage protection level	U_p	kV	< 2,0
Response time	t_A	ns	<100
Follow current interrupt rating	I_{fi}	kA	25
Maximum back-up fuse		A	500
Temperature range	ϑ	°C	-40 - +85
Division unit TE (17.5 mm)			6
Connection cross-section, rigid		mm ²	10 - 50
Connection cross-section, multi-wire		mm ²	10 - 35

Connection-/Circuit diagram

Connection cross-section, flexible

mm²

10 - 25

Legend



230/400 V system



Protection device to DIN EN 61643-11 or IEC 61643-11



Transition from LPZ 0 to LPZ 1



MAGYAR ELEKTROTECHNIKAI ELLENŐRZŐ INTÉZET Budapest, Hungary



Russia, GOST The State Committee for Standards



5-year warranty



Communautés Européennes, EC declaration of conformity according to EC directives