


# Technical data sheet


## Fine protection for RS232 with screwless terminals

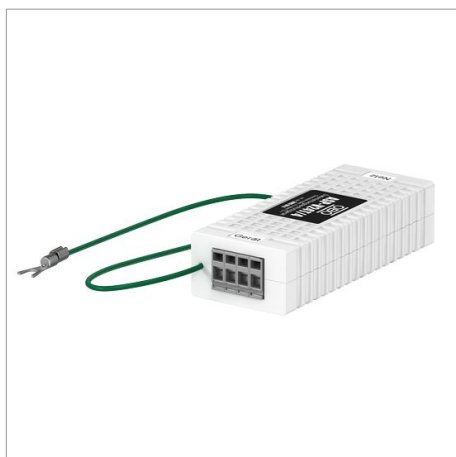

Data cable protection device, serial interface

- Screwless terminal connections
- Direct installation in the cable compartment
- Adhesive Velcro connection included

Application: direction installation in the cable compartment

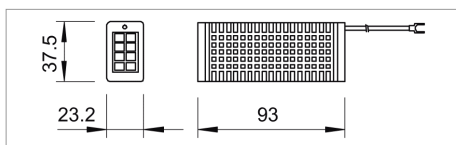


Type	Max. continuous operating voltage V	Version	Connection system	Pack. pcs	Weight kg/100 pcs.	Art.-No.
ASP-V24T 4	18	4 pole, V24		1	7.500	5083060
ASP-V11EI 4	7.5	4 pole, V11		1	7.500	5083087

/pc.



## Connection-/Circuit diagram

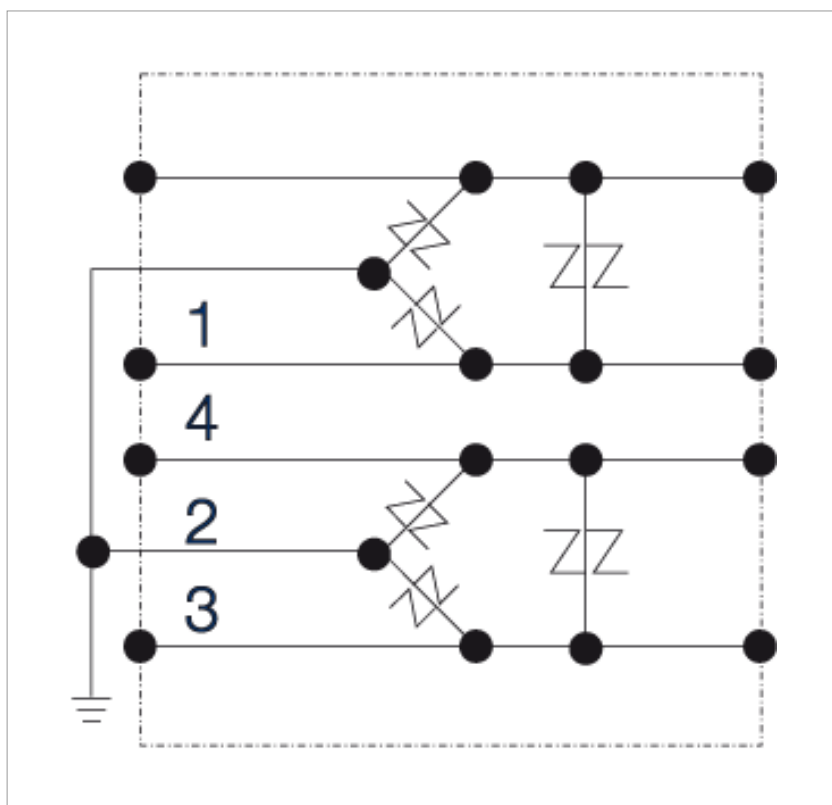

Article number			5083060	5083087
Max. continuous operating voltage	$U_C$	V	18	7.5
Lightning protection Zone LPZ			2→3	2→3
Nominal discharge current (8/20)	$I_n$	kA	0.34	0.75
Protection level (sym.) with $I_n$ C2			≤65 V	≤110 V
Protection level (asym.) with $I_n$ C2			≤55 V	≤120 V
Protection level (asym.) with 1 kV/μs C3			≤25 V	≤10 V

## Legend



5-year warranty



Communautés Européennes, EC declaration of conformity according to EC directives



Transition from LPZ 2 to LPZ 3