


## NSM PRO AZ (924 339)


- Surge protection with monitoring device and disconnecter
- Visual operating state (green) and fault indication (red)
- With retaining ring (diameter of 60 mm) for installation into switchboxes with a diameter of 60 mm and a depth of 40 mm



Figure without obligation



Basic circuit diagram NSM PRO AZ

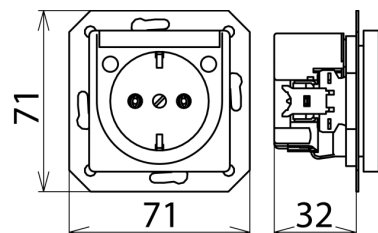

Dimension drawing NSM PRO AZ

Socket outlet with surge protection

Type	NSM PRO AZ
Part No.	924 339
SPD according to EN 61643-11	Type 3
SPD according to IEC 61643-1/-11	Class III
Nominal a.c. voltage ( $U_N$ )	230 V
Max. continuous operating a.c. voltage ( $U_C$ )	255 V
Nominal discharge current (8/20 $\mu$ s) ( $I_n$ )	3 kA
Total discharge current (8/20 $\mu$ s) [L+N-PE] ( $I_{total}$ )	5 kA
Combined impulse ( $U_{OC}$ )	6 kV
Combined impulse [L+N-PE] ( $U_{OC total}$ )	10 kV
Voltage protection level [L-N] ( $U_P$ )	$\leq 1.25$ kV
Voltage protection level [L/N-PE] ( $U_P$ )	$\leq 1.5$ kV
Response time [L-N] ( $t_A$ )	$\leq 25$ ns
Response time [L/N-PE] ( $t_A$ )	$\leq 100$ ns
Max. mains-side overcurrent protection	16 A gL/gG or B 16 A
Short-circuit withstand capability for mains-side overcurrent protection with 16 A gL/gG	6 kA <sub>rms</sub>
Temporary overvoltage (TOV) [L-N] ( $U_T$ )	335 V / 5 sec.
Temporary overvoltage (TOV) [L/N-PE] ( $U_T$ )	400 V / 5 sec.
Temporary overvoltage (TOV) [L+N-PE] ( $U_T$ )	1200 V + $U_{CS}$ / 200 ms
TOV characteristic [L-N]	withstand
TOV characteristic [L/N-PE]	withstand
TOV characteristic [L+N-PE]	safe
Fault indication	red light
Operating state indication	green light
Number of ports	1
Operating temperature range ( $T_U$ )	-25°C...+40°C
Cross-sectional area	screwless double terminals up to 2.5 mm <sup>2</sup> each, also suitable for series connection
For mounting on	retaining ring ( $\varnothing$ 60 mm) for installation into 32 mm deep switch boxes
Enclosure material	thermoplastic, UL 94 V-2
Place of installation	indoor installation
Degree of protection	IP 20
DELTA line	DELTA profil, anthracite
Weight	122 g
Customs tariff number	85363010
GTIN	4013364071759
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.